

Slide-Rail 8Ch Mobile DVR

Model No.: **CLD-4860VX8**

Dimension:




213.5mm (D) x 150mm (W) x 55.5mm (H)

Special Features:

- Designed with USB Host & Slave port for firmware updating & data downloading.
- Designed with G-sensor port, driver action interface (record up to 8 kinds of driver actions with image and show on playback) and delay off time switch.
- Support PC Player to playback recorded data on PC.
- Designed with firmware update feature and function expandable.
- Support system cable for plug-and-play installation.
- GPS device to record GPS data, head direction, speed and support speed management to record speeding events and support mapping at the side while playback.
- Patent design to speed up trouble-shooting in the field.

Application:

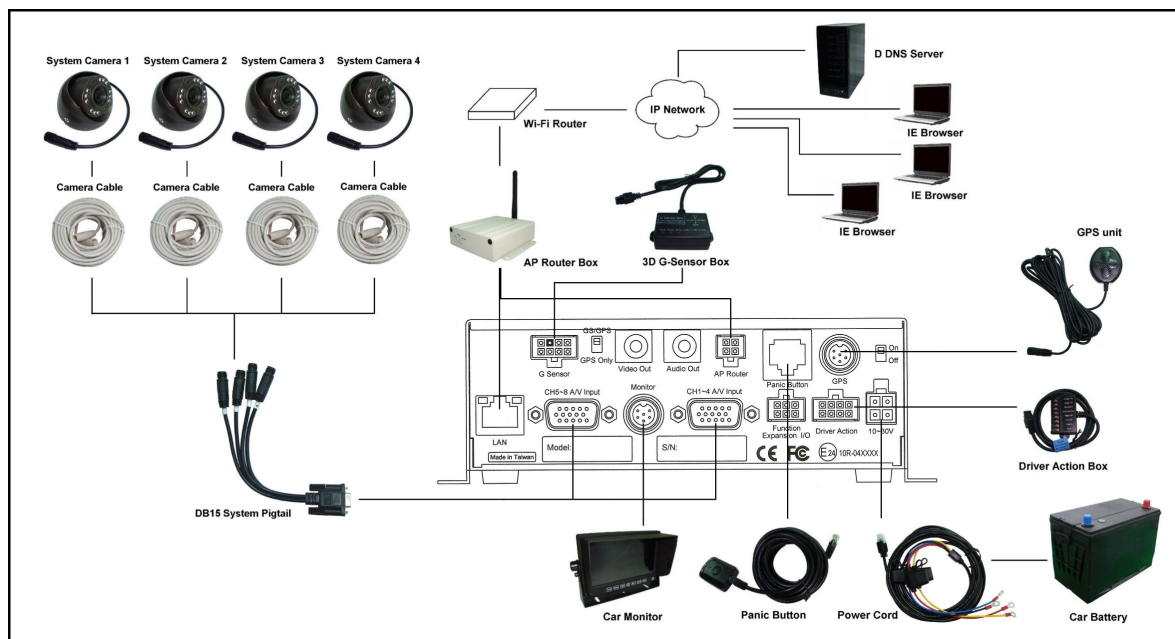

Designer, Manufacturer & Exporter
GEORGE TANG INDUSTRIAL CORP.
Headquarters:
12th Floor, 1 Chan Chian, Miao-Li City, Taiwan, R.O.C.

Tel: 886-37-266949 / 266922 (Rep.) Fax: 886-37-266675 / 266768
E-mail: voyager@gtico.com.tw or voyager1@ms13.hinet.net
Home page: <http://www.gtico.com.tw>

Slide-Rail 8Ch Mobile DVR

Model No.: **CLD-4860VX8**

Technical Specifications:

Item	Description
Video Input Format	NTSC / PAL
Operating System	Non-OS, DSP base: Flexibility, Integration, Consistence, Completeness
Video Input Channels	8CH
Video Output Channels	1CH (normal) / 3CH (maximum)
Display Frame Rate	NTSC: 120fps / 240fps PAL: 100fps / 200fps
Recording Frame Rate	NTSC: 120fps (720x480) PAL: 100fps (720x588)
Recording Mode	Continuous, Motion Detection, Alarm, Event, Schedule
Compression Format	H4L (H.264 Like) or M-JPEG (dual mode)
Motion Detection	Yes
Video Signal Loss Detection	Yes
Time Display	Yes
Power Shut-Down Recovery	Yes
Play Mode	1CH full screen or 8CH quad
Pre-record	Pre-record time: 300fps Post-record time: 10~60 seconds (10/20/30/40/50/60 seconds)
HDD Alarm	HDD full alarm or overwrite select
HDD Failure Alarm	Yes
OSD Language	English
View Mode	1CH full screen or 8Ch quad or sequence or PIP (Picture in Picture)
Picture Storage	2.5" SATA HDD
Video I/O	8Ch inputs / 1CH output
Audio I/O	8Ch inputs / 1CH output
Daylight Saving Time	Yes
Function Expansion Port	Yes (for driver action record and speed management device)
G-sensor function	Yes
USB Host for Firmware Update	Yes (or CF socket)
F/W Setting Copy	Yes (copy current setting to USB)
Power Control and Delay Off Setting	Yes (set delay off 5/10/30/60 minutes after key-off)
PC Player	Yes (support Google Map, GPS output, convert .AVI file)
Event Email Alert (Notification)	Yes
Traffic Control Cloud Server	Yes
Remote Downloading	Yes

* Above specification is subject to change without notice.



Designer, Manufacturer & Exporter

GEORGE TANG INDUSTRIAL CORP.

Headquarters:

12th Floor, 1 Chan Chian, Miao-Li City, Taiwan, R.O.C.

Tel: 886-37-266949 / 266922 (Rep.) Fax: 886-37-266675 / 266768

E-mail: voyager@gtico.com.tw or voyager1@ms13.hinet.net

Home page: <http://www.gtico.com.tw>